

# Phaser® 3250

## Black-and-White Laser Printer

### Compact, business-ready productivity

This powerful little printer is ready to support a single user or a small workgroup with fast, automatic two-sided printing, office-friendly convenience, and outstanding overall value.



#### More performance, for less


- **Get work done fast**, with a print speed of up to 30 ppm and a first-page-out time less than 9 seconds.
- **Automatic two-sided printing** saves valuable time and paper.
- A network configuration — with both Windows, Mac and Linux compatibility — is truly business-ready.
- The 400 MHz processor ensures all jobs print quickly and accurately, even when they're loaded with graphics.

#### Convenience, flexibility

- A surprisingly small footprint makes it easy to position within quick reach.
- Standard 32 MB memory can expand to 160 MB for enhanced performance when your workload demands it.
- Add a second 250-sheet paper tray for a total capacity of 500 sheets.
- Print on custom sizes and a wide range of media, from transparencies and cardstock, to envelopes and postcards.
- Power Save and Toner Save modes help you spend less on electricity and consumables.

#### Always impressive results

- 1200 image quality print resolution adds visual impact to important jobs.
- PostScript® 3™ compatibility and PCL® 6 emulation ensure your print jobs are always accurate.
- A 30,000-page monthly duty cycle handles big print volumes with ease.
- Outstanding Xerox quality, reliability and performance are backed by Xerox Service and Support, a standard one-year warranty, and the unmatched Xerox Total Satisfaction Guarantee.

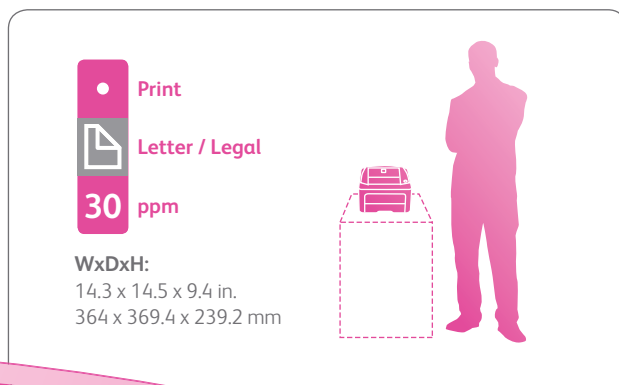


**Print**

**Letter / Legal**

**30 ppm**

**WxDxH:**  
14.3 x 14.5 x 9.4 in.  
364 x 369.4 x 239.2 mm



# Phaser® 3250

## Black-and-White Laser Printer



	Phaser® 3250D	Phaser® 3250DN
<b>Speed</b>	Up to 30 ppm (Letter) / 28 ppm (A4)	
<b>Duty Cycle</b>	Up to 30,000 pages / month	
<b>Paper Handling</b>	<b>Multipurpose Tray:</b> 1 sheet; Custom sizes: 3 x 5 in. to 8.5 x 14 in. / 76 x 127 mm to 216 x 356 mm <b>Tray 1:</b> 250 sheets; Sizes: Letter, Legal, Folio, Oficio, A4, JIS B5, ISO B5, Executive, A5, A6 <b>Tray 2:</b> 250 sheets; Sizes: Letter, Legal, Folio, Oficio, A4, JIS B5, ISO B5, Executive, A5, A6	
Paper input	Standard	
	Optional	
Paper output	150 sheets	
Automatic two-sided output	Standard	
<b>Print</b>		
First-page-out-time	As fast as 8.5 seconds	
Resolution	Up to 1200 image quality	
Processor	400 MHz	
Memory (std./max)	32 MB / 160 MB	
Connectivity	USB 2.0	10/100Base-TX Ethernet, USB 2.0
Language support	PCL® 6 and 5e emulations, IBM Pro Printer emulation, Epson emulation, GDI	PostScript® 3™ compatibility, PCL® 6 and 5e emulations, IBM ProPrinter emulation, Epson emulation, GDI
Print features	Watermarks, Poster printing, N-up, Fit to page, Scaling, Overlays, Booklets, Reduce/enlarge, Toner saver, Custom-size pages	
<b>Warranty</b>	One-year Quick Exchange, Xerox Total Satisfaction Guarantee	

### Device Management

Printer Setting Utility for Windows, 3250DN add: CentreWare® Internet Services, SNMP 1-2, Ethernal, HTTP, TCP/IP (DN configuration)

### Print Drivers

Windows® 2000/XP/2003 Server, Vista, Mac OS®X version 10.3-10.5, Various Linux® OS including SUSE™ 8.2-9.2, Red Hat® 8-9, Fedora™ Core 1-4, Mandrake 9.2-10.1

### Font Support

1 bitmap, 45 scalable, 136 PostScript® fonts

### Media Handling

Multipurpose Tray: 16 – 43 lb. bond / 60 – 163 gsm

Media types: Plain paper, envelopes, transparencies, labels, cardstock

Tray 1 and Tray 2 (optional): 16 – 28 lb. bond / 60 – 105 gsm

Media types: Plain paper

Two sided printing: 20 – 24 lb. bond / 75 – 90 gsm

### Operating Environment

Temperature: Storage: 32° to 104° F / 0° to 35° C,

Operating: 50° to 90° F / 10° to 32° C

Humidity: 20% to 80%

Sound pressure levels:

Printing: 54 dB(A)

Standby: 29 dB(A)

Warm-up time (from sleep mode): Less than 15 seconds

### Electrical

Power: 110–127 VAC, 50/60 Hz or 220–240 VAC, 50/60 Hz

Power consumption: Standby: 70 W

Printing: 400 W

Power save: 11 W

ENERGY STAR® qualified

### Dimensions (WxDxH)

14.3 x 14.5 x 9.4 in. / 364 x 369.4 x 239.2 mm

Weight: 26.19 lbs / 11.88 kg

Optional 250-sheet Tray 2: 14.3 x 15.7 x 3.4 in. /

364 x 400 x 86 mm

Weight: 8.09 lbs / 3.67 kg

Package Dimensions (WxDxH):

22.1 x 18.6 x 13.5 in.

562 x 472 x 344 mm

### Certifications

Listed UL 60950/CSA C22.2 No. 60950, CE Mark applicable to Directives 2006/95/EC and 2004/108/EC

### What Comes In The Box

- Phaser 3250 Printer
- Print Cartridge (2,000 print capacity<sup>1</sup>)
- Software and Documentation CD (with User Manual, Quick Installation Guide, Warranty Statement, Registration Card)
- Power cord
- USB cable



Phaser 3250 shown with optional Tray 2

### Supplies

Standard-Capacity Print Cartridge<sup>1</sup>: 3,500 std. pages 106R01373

High-Capacity Print Cartridge<sup>1</sup>: 5,000 std. pages 106R01374

<sup>1</sup> Average standard pages. Declared Yield in accordance with ISO/IEC 19752. Yield will vary based on image, area coverage and print mode.

### Options

250-sheet Tray 098N02194

128 MB Phaser Memory 098N02195

### Supplies Recycling Program

Consumables for the Phaser 3250 are part of the Xerox Green World Alliance Supplies Recycling Program. For more information, please visit the Green World Alliance website at [www.xerox.com/gwa](http://www.xerox.com/gwa)

