

XEROX®

Technology | Document Management | Consulting Services

Phaser® 6180



color laser printer

Office **color**
made **easy**



Phaser® 6180

Color Laser Printer

Introducing fast color performance to your office.

Blazing a new trail among fast, affordable, easy-to-use color laser printers, the Xerox Phaser 6180 delivers the speed and print quality today's small to medium-size businesses have been waiting for. High-performance features and unparalleled ease-of-use deliver spectacular results, page after page.

Step up the pace

The Phaser 6180 laser printer gets your jobs out quickly. Very quickly.

- A print speed of up to 20 ppm in full color brings your work to colorful life without slowing you down.
- Print black-and-white — even complex or large jobs — at up to a speedy 26 ppm thanks to a powerful 400 MHz processor.
- A first-page-out time as quick as 10 seconds means your job's out faster than your trip to the printer.
- Flexible connectivity options, such as 10/100Base-TX Ethernet, USB, parallel and optional wireless adapter, give you the power to support the printing needs of your entire office.

Unleash your potential


With vibrant, true-to-life colors and crisp text and image definition, the Phaser 6180 prints like a pro.

- A print resolution of up to 600 x 600 x 4 dpi delivers sixteen shades of color per pixel, producing exceptional photographic quality.
- Emulsion Aggregation (EA) High Gloss toner uses smaller, more uniform toner "particles" to bring more detail and clarity to every image.
- True Adobe® PostScript® 3™ print language ensures bright, vivid, accurate colors and graphics.
- Onboard color capabilities, including PANTONE® Color approved solid-color simulations, Xerox color correction technology and expert calibration tools, automatically give you the right color or let you fine-tune colors for special applications.
- With the onboard duplexer (standard on DN configuration), the Phaser 6180 gives you fast, automatic two-sided printing.
- The 60,000-page-per-month duty cycle easily handles your demanding workload.



The user-friendly control panel features convenient onscreen status and toner-level indicators.



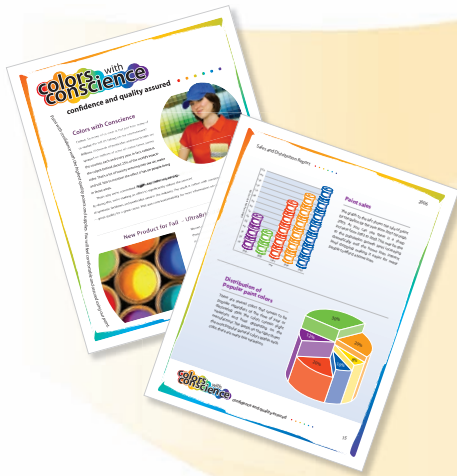

Designed to adapt to the dynamic needs of today's small to medium-size businesses.

- 1 The 150-sheet Tray 1 (MPT) supports a wide range of custom media and sizes.
- 2 A generous 250-sheet Tray 2 feeds up to 80 lb. cover (220 gsm) media.
- 3 Add an optional 550-sheet feeder for a total input capacity of 950 sheets.
- 4 Fast, money-saving, two-sided printing is standard on the DN configuration.
- 5 Standard 128 MB memory is upgradable to 1,152 MB, allowing for seamless printing of even the most demanding, graphic-heavy print jobs.

Work hard, print easy

From installation to everyday operation, the Phaser 6180 laser printer provides a wealth of features to make office life easier.

- Included installation software is extremely fast and easy, getting you up and running in minutes with no IT required.
- Keep tabs on print jobs and get quick access to online support from the comfort of your chair with CentreWare® IS Embedded Web Server which works seamlessly with your browser.
- The front-panel toner gauge provides a quick, visual check of current toner levels, and user-friendly front access means no more moving the printer to replace supplies.
- Less consumables to change for greater ease-of-use.
- Built-in support for Apple Bonjour™ and included Mac drivers make the Phaser 6180 a true team player in PC/Mac environments.
- PrintingScout™ saves precious time by tracking print jobs and providing immediate print-issue alerts with correction suggestions.
- Super-quiet operation makes the Phaser 6180 laser printer office-friendly.



Phaser® 6180

Call today. For more information, call **1-877-362-6567** or visit us at **www.xerox.com/office**



	Phaser 6180N	Phaser 6180DN
Speed	Up to 20 ppm color / 26 ppm black-and-white	
Duty Cycle	60,000 pages / month ¹	
Paper Handling		
Paper input	Standard	Tray 1 (MPT): 150 sheets; Custom sizes: 3 x 5 in. to 8.5 x 14 in. / 76.2 x 127 mm to 220 x 355.6 mm
		Tray 2: 250 sheets; Custom sizes: 5.8 x 8.2 in. to 8.5 x 14 in. / 148 x 210 mm to 220 x 355.6 mm
	Optional	Tray 3: 550 sheets; Custom sizes: 5.8 x 8.2 in. to 8.5 x 14 in. / 148 x 210 mm to 220 x 355.6 mm
Paper output	300 sheets	
Two-sided output	Optional	Standard
Print		
First-page-out time	As fast as 10 seconds color	
Resolution (max)	600 x 600 x 4 dpi	
Processor	400 MHz	
Memory (std / max)	128 MB / 1152 MB	
Connectivity	10/100Base-TX Ethernet, USB 2.0, Parallel, Optional multi-protocol network card, Optional wireless network adapter	
Page Description Languages	Adobe® PostScript® 3™, PCL® 6 emulation	
Print features	Standard	Booklet printing ² , Covers ² , Separators, Transparency separators, N-up, Watermarks ² , Poster printing ² , Banner sheets ² , Fit to page
	Additional ³	Secure Print, Proof Print, RAM collation
Warranty	One-year on-site warranty, Xerox Total Satisfaction Guarantee	

¹ Print volume uniformly distributed over 30 days

² Accessed via PCL driver

³ Requires minimum 256 MB RAM

Device Management

CentreWare® IS Embedded Web Server, CentreWare Web, PrintingScout™, MailLinX email alerts

Print Drivers

Windows® 2000/XP/2003 Server, Vista, Mac OS® X version 10.2 or higher, Unix: Solaris™ 8/9/10, HP-UX® 11.0, AIX® 4.3.3, Linux: SUSE™ 9.2/9.3, Turbo Linux™ 10, Red Hat® ES3/ES4, Fedora™ Core 1, Yellow Dog 3.X

Font Support

PostScript® fonts: 136; PCL® fonts: 81

Media Handling

Tray 1 (MPT), Tray 2, Tray 3 (optional): 17–40 lb. bond to 40–80 lb. cover / 65–220 gsm
Two-sided output: 17–43 lb. bond / 65–163 gsm
Media types: Plain paper, glossy, envelopes, labels, transparencies, card stock, business card stock

Color Standards

PANTONE® Color approved solid-color simulations, Color correction tables

Operating Environment

Temperature: Storage: 32° to 95° F / 0° to 35° C, operating: 50° to 90° F / 10° to 32° C
Humidity: 15% to 80%
Sound pressure levels: Printing: 49.1 dB(A)
Standby: 28.6 dB(A)
Sound power levels: Printing: 6.62 B, Standby: 4 B
Warm-up time (from sleep mode): 20 seconds

Electrical

Power: 110–127 VAC, 50/60 Hz or 220–240 VAC, 50/60 Hz
Power consumption: 110–127 VAC: Standby: 70 W
Printing: 450 W
Power save: 5.4 W
220–240 VAC: Standby: 68.9 W
Printing: 410 W
Power save: 6.3 W
ENERGY STAR® qualified

Dimensions (WxDxH)

15.7 x 19.4 x 18.5 in. / 400 x 493 x 470 mm
Weight: 6180N: 59.8 lb. / 27.2 kg, 6180DN: 62.3 lb. / 28.3 kg
Optional 550-sheet feeder: 15.7 x 19.4 x 5.4 in. / 400 x 493 x 138 mm
Weight: 16.9 lb. / 7.7 kg

Certifications

FCC Part 15, Class B, Listed UL 60950-1/CSA 60950-1-03, CE Mark applicable to Directives 73/23/EEC and 89/336/EEC, Section 508 ADA

Supplies

Standard-Capacity Print Cartridge¹:
Black: 3,000 std. pages 113R00722
Cyan: 2,000 std. pages 113R00719
Magenta: 2,000 std. pages 113R00720
Yellow: 2,000 std. pages 113R00721

High-Capacity Print Cartridge¹:

Black: 8,000 std. pages 113R00726
Cyan: 6,000 std. pages 113R00723
Magenta: 6,000 std. pages 113R00724
Yellow: 6,000 std. pages 113R00725

¹Average Continuous Composite CMY Yield in accordance with ISO/IEC 19798. Yield will vary based on image, area coverage and print mode.

Options

550-Sheet Feeder 097S03744
256 MB Phaser Memory 097S03743
512 MB Phaser Memory 097S03635
Multi-Protocol Network Card 097S03773
Duplex Unit 097S03746
Wireless Network Adapter
–N. America Power Converter 097S03740
–European Power Converter 097S03741
–UK Power Converter 097S03742



Copyright © 2007 XEROX CORPORATION. All rights reserved. Contents of this publication may not be reproduced in any form without permission of XEROX CORPORATION. XEROX®, Phaser®, CentreWare® and PrintingScout™ are trademarks of XEROX CORPORATION in the U.S. and/or other countries. Total Satisfaction Services is a service mark of XEROX CORPORATION. PANTONE® Colors generated may not match PANTONE-identified standards. Consult current PANTONE publications for accurate color. PANTONE®, and other Pantone, Inc. trademarks are the property of Pantone, Inc. Adobe® and PostScript® 3™ are registered trademarks or trademarks of Adobe Systems, Incorporated. PCL® is a registered trademark of Hewlett-Packard. As an ENERGY STAR® partner, XEROX CORPORATION has determined that this product meets the ENERGY STAR guidelines for energy efficiency. ENERGY STAR and the ENERGY STAR mark are registered U.S. marks. All other trademarks are the property of their respective manufacturers. The information in this brochure is subject to change without notice. 2/07 610P727170B 618BR-01UC